


BM Star (55 HRC) Ball Nose End Mills - Regular Series

Type : Works standard regular series, right-hand cutting, straight shank, CNC radius on face cutting lips $R=1/2 d \pm 0,02$

Design Features : 2 fluted / 4 fluted centre cutting, helix angle 30° , CNC grinding

Application : High Performance end mills for slot milling and form copying. For milling of Cast iron, malleable cast iron, steel, steel casting, heat-resisting steel and plastics in design and profile manufacturing.

▲ For Speed & Feed chart refer page 38

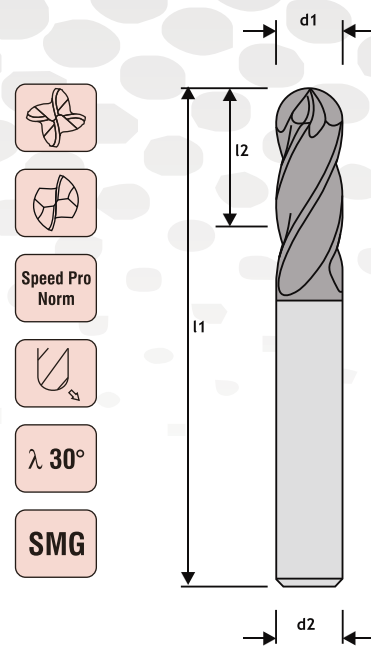

BM Star (55 HRC) Ball Nose End Mills Regular Series

Article No.		Dimension (mm)				Uncoated	
2 Flute	4 Flute	$\varnothing d1$ h10	$\varnothing d2$ h6	l2	l1		
T-SBM2010	T-SBM4010	1	3	4	38	<input type="checkbox"/>	<input checked="" type="checkbox"/>
T-SBM2015	T-SBM4015	1.5	3	5	38	<input type="checkbox"/>	<input checked="" type="checkbox"/>
T-SBM2020	T-SBM4020	2	3	6	38	<input type="checkbox"/>	<input checked="" type="checkbox"/>
T-SBM2025	T-SBM4025	2.5	3	9	38	<input type="checkbox"/>	<input checked="" type="checkbox"/>
T-SBM2030	T-SBM4030	3	3	12	38	<input type="checkbox"/>	<input checked="" type="checkbox"/>
T-SBM2035	T-SBM4035	3.5	4	12	50	<input type="checkbox"/>	<input checked="" type="checkbox"/>
T-SBM2040	T-SBM4040	4	4	14	50	<input type="checkbox"/>	<input checked="" type="checkbox"/>
T-SBM2050	T-SBM4050	5	5	16	50	<input type="checkbox"/>	<input checked="" type="checkbox"/>
T-SBM2060	T-SBM4060	6	6	19	57	<input type="checkbox"/>	<input checked="" type="checkbox"/>
T-SBM2080	T-SBM4080	8	8	20	63	<input type="checkbox"/>	<input checked="" type="checkbox"/>
T-SBM2100	T-SBM4100	10	10	22	75	<input type="checkbox"/>	<input checked="" type="checkbox"/>
T-SBM2120	T-SBM4120	12	12	25	75	<input type="checkbox"/>	<input checked="" type="checkbox"/>
T-SBM2140	T-SBM4140	14	14	32	89	<input type="checkbox"/>	<input checked="" type="checkbox"/>
T-SBM2160	T-SBM4160	16	16	32	89	<input type="checkbox"/>	<input checked="" type="checkbox"/>
T-SBM2180	T-SBM4180	18	18	38	100	<input type="checkbox"/>	<input checked="" type="checkbox"/>
T-SBM2200	T-SBM4200	20	20	38	100	<input type="checkbox"/>	<input checked="" type="checkbox"/>
T-SBM2250	T-SBM4250	25	25	38	100	<input type="checkbox"/>	<input checked="" type="checkbox"/>

Available ex stock / subject to prior sale

Delivery time on request - mention if uncoated in the article no. eg. **T-SBM-U-4010**

SMG Sub Micron Grade


BM Star (55 HRC) Ball Nose End Mills - Extra Long Series

Type : Works standard extra long series, right hand cutting, straight shank, CNC radius on face cutting lips $R=1/2 d \pm 0,02$

Design Features : 2 fluted / 4 fluted centre cutting, helix angle 30° , CNC grinding

Application : High Performance end mills for slot milling and form copying. For milling of Cast iron, malleable cast iron, steel, steel casting, heat-resisting steel and plastics in design and profile manufacturing.

▲ For Speed & Feed chart refer page 38

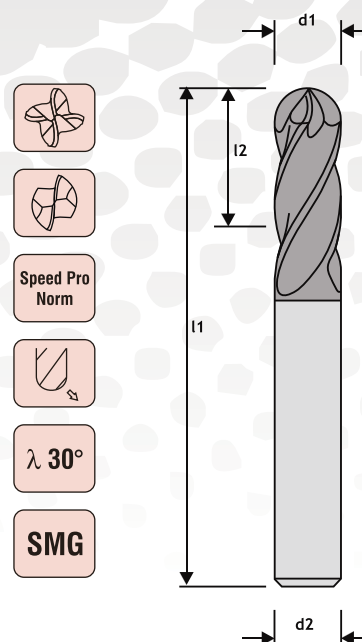

BM Star (55 HRC) Ball Nose End Mills Regular Series

Article No.		Dimension (mm)				Uncoated	TiAlN Coated
2 Flute	4 Flute	$\varnothing d1$ h10	$\varnothing d2$ h6	l2	l1		
T-SBM2030L	T-SBM4030L	3	3	25	75	<input type="checkbox"/>	<input checked="" type="checkbox"/>
T-SBM2040L	T-SBM4040L	4	4	25	75	<input type="checkbox"/>	<input checked="" type="checkbox"/>
T-SBM2050L	T-SBM4050L	5	5	25	75	<input type="checkbox"/>	<input checked="" type="checkbox"/>
T-SBM2060L	T-SBM4060L	6	6	25	75	<input type="checkbox"/>	<input checked="" type="checkbox"/>
T-SBM2080L	T-SBM4080L	8	8	25	75	<input type="checkbox"/>	<input checked="" type="checkbox"/>
T-SBM2100L	T-SBM4100L	10	10	38	100	<input type="checkbox"/>	<input checked="" type="checkbox"/>
T-SBM2120L	T-SBM4120L	12	12	50	100	<input type="checkbox"/>	<input checked="" type="checkbox"/>
T-SBM2140L	T-SBM4140L	14	14	75	150	<input type="checkbox"/>	<input checked="" type="checkbox"/>
T-SBM2160L	T-SBM4160L	16	16	75	150	<input type="checkbox"/>	<input checked="" type="checkbox"/>
T-SBM2180L	T-SBM4180L	18	18	75	150	<input type="checkbox"/>	<input checked="" type="checkbox"/>
T-SBM2200L	T-SBM4200L	20	20	75	150	<input type="checkbox"/>	<input checked="" type="checkbox"/>
T-SBM2250L	T-SBM4250L	25	25	75	150	<input type="checkbox"/>	<input checked="" type="checkbox"/>

Available ex stock / subject to prior sale

Delivery time on request - mention if uncoated in the article no. eg. **T-SBM-U-4030L**

SMG Sub Micron Grade


BM Star (55 HRC) Ball Nose End Mills - Deep Reach + XL Series

Type : Works standard extra long series, right hand cutting, straight shank, CNC radius on face cutting lips $R=1/2 d \pm 0,02$

Design Features : 2 fluted / 4 fluted centre cutting, helix angle 30° , CNC grinding

Application : High Performance end mills for slot milling and form copying. For milling of Cast iron, malleable cast iron, steel, steel casting, heat-resisting steel and plastics in design and profile manufacturing.

▲ For Speed & Feed chart refer page 38

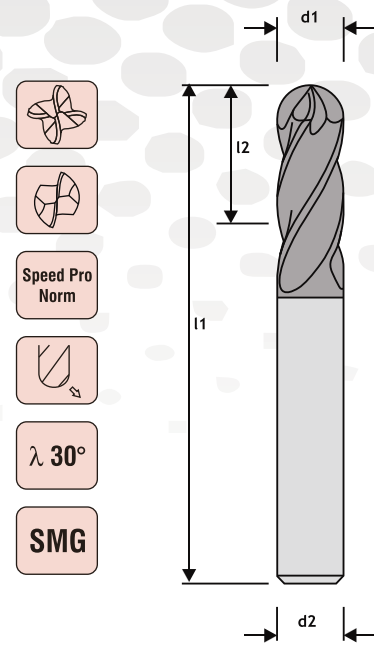

BM Star (55 HRC) Ball Nose End Mills Deep Reach +XL Series

Article No.		Dimension (mm)				Uncoated	TiAlN Coated
2 Flute	4 Flute	$\varnothing d1$ h10	$\varnothing d2$ h6	l2	l1		
T-SBM2030DR	T-SBM2030DR	3	3	12	75	<input type="checkbox"/>	<input checked="" type="checkbox"/>
T-SBM2040DR	T-SBM2040DR	4	4	12	75	<input type="checkbox"/>	<input checked="" type="checkbox"/>
T-SBM2050DR	T-SBM2050DR	5	5	12	75	<input type="checkbox"/>	<input checked="" type="checkbox"/>
T-SBM2060DR	T-SBM2060DR	6	6	15	100	<input type="checkbox"/>	<input checked="" type="checkbox"/>
T-SBM2060DRXL	T-SBM2060DRXL	6	6	15	150	<input type="checkbox"/>	<input checked="" type="checkbox"/>
T-SBM2080DR	T-SBM2080DR	8	8	25	100	<input type="checkbox"/>	<input checked="" type="checkbox"/>
T-SBM2080DRXL	T-SBM2080DRXL	8	8	25	150	<input type="checkbox"/>	<input checked="" type="checkbox"/>
T-SBM2100DR	T-SBM2100DR	10	10	25	100	<input type="checkbox"/>	<input checked="" type="checkbox"/>
T-SBM2100DRXL	T-SBM2100DRXL	10	10	25	150	<input type="checkbox"/>	<input checked="" type="checkbox"/>
T-SBM2120DR	T-SBM2120DR	12	12	25	100	<input type="checkbox"/>	<input checked="" type="checkbox"/>
T-SBM2120DRXL	T-SBM2120DRXL	12	12	25	150	<input type="checkbox"/>	<input checked="" type="checkbox"/>
T-SBM2140DR	T-SBM2140DR	14	14	32	150	<input type="checkbox"/>	<input checked="" type="checkbox"/>
T-SBM2160DR	T-SBM2160DR	16	16	32	150	<input type="checkbox"/>	<input checked="" type="checkbox"/>
T-SBM2180DR	T-SBM2180DR	18	18	40	150	<input type="checkbox"/>	<input checked="" type="checkbox"/>
T-SBM2200DR	T-SBM2200DR	20	20	40	150	<input type="checkbox"/>	<input checked="" type="checkbox"/>
T-SBM2250DR	T-SBM2250DR	25	25	40	150	<input type="checkbox"/>	<input checked="" type="checkbox"/>

■ Available ex stock / subject to prior sale

□ Delivery time on request - mention if uncoated in the article no. eg. **T-SBM-U-4060DR**

SMG Sub Micron Grade