

Superstar Slotting & Pocketing End Mills - Regular Series

Type : N, right hand cutting, straight shank according to DIN 6535HA.

Design Features : 3 fluted centre cutting, helix angle 45°, CNC grinding.

Applications : Solid carbide high performance end mills for efficient machining of titanium, inconel, stainless steel. Recommended for plunge milling. Excellent for slotting & pocketing in stainless steel material.

▲ For Speed & Feed chart refer page 47




Speed Pro Norm



λ 45°

SMG

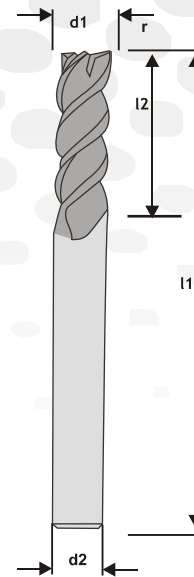

Superstar High Performance End Mills - Regular Series

Article No.	Dimension (mm)					TiAlN Coated
	3 Flute	Ø d1	Ø d2	l2	l1	
		h8	h6			
SU-SEM3030	3	3	6	6	50	■
SU-SEM3035	3.5	3.5	6	8	50	■
SU-SEM3040	4	4	6	8	50	■
SU-SEM3045	4.5	4.5	6	10	50	■
SU-SEM3050	5	5	6	10	50	■
SU-SEM3055	5.5	5.5	6	13	57	■
SU-SEM3060	6	6	6	13	57	■
SU-SEM3065	6.5	6.5	8	16	63	■
SU-SEM3070	7	7	8	16	63	■
SU-SEM3075	7.5	7.5	8	16	63	■
SU-SEM3080	8	8	8	19	63	■
SU-SEM3085	8.5	8.5	10	19	75	■
SU-SEM3090	9	9	10	19	75	■
SU-SEM3095	9.5	9.5	10	19	75	■
SU-SEM3100	10	10	10	22	75	■
SU-SEM3110	11	11	12	22	80	■
SU-SEM3120	12	12	12	26	75	■
SU-SEM3130	13	13	14	26	75	■
SU-SEM3140	14	14	14	26	89	■
SU-SEM3150	15	15	16	26	100	■
SU-SEM3160	16	16	16	30	100	■
SU-SEM3200	20	20	20	32	100	■

■ Available ex stock / subject to prior sale

SMG Sub Micron Grade